PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 4:		(11) International Publication Number:	WO 89/ 04616	
A43B 05/00, A43C 15/16	A1	(43) International Publication Date:	1 June 1989 (01.06.89)	
(21) International Application Number: PCT/U (22) International Filing Date: 22 November 1988	•	ropean patent), CH (Europe	ean patent), DE (European patent), GB (European	

124,145 (31) Priority Application Number:

23 November 1987 (23.11.87) (32) Priority Date:

US (33) Priority Country:

(71) Applicant: FOOT-JOY, INC. [US/US]; 144 Field Street, Brockton, MA 02402 (US).

(72) Inventor: FERREIRA, Joseph, J.; 595 Pleasant Street, Raynham, MA 02767 (US).

(74) Agent: McKENNEY, Charles, E.; Pennie & Edmonds, 1155 Avenue of the Americas, New York, NY 10036 (US).

patent), NL (European patent), SE (European patent).

Published

With international search report.

(54) Title: REMOVABLE SHOE SPIKE LOCKABLE TO CONFIGURED SOLE PLATE

(57) Abstract

A spike shoe construction including a socket (17-23) carrying ribbed insert mounted on and spaced from an outer sole (36) with each socket (17-23) carrying reusable lock means (41) for locking spikes (26) installed in the socket (17-23) Each spike (26) in turn carries a lock means (33) which is non-reusable in that it is so distorted or broken when removed to render it inoperative.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	ML	Mali
ΑU	Australia	GA	Gabon	MR	Mauritania
BB	Barbados	GB	United Kingdom	MW	Malawi
BE	Belgium	HU	Hungary	NL	Netherlands
BG	Bulgaria	ΙT	Italy	NO	Norway
BJ	Benin	JР	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic		of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
DE	Germany, Federal Republic of	LU	Luxembourg	TG	Togo
DK	Denmark	MC	Мопасо	US	United States of America
FI	Finland	MG	Madagascar		

-1-

REMOVABLE SHOE SPIKE LOCKABLE TO CONFIGURED SOLE PLATE Background of the Invention

Plastic spikes for golf and other spiked shoes have been in use for a number of years (See U. S. Patent No. 4,587,748). Sole inserts made of plastic for supporting spikes have also been used.

Sole insert and spike systems as structural components in shoe construction, as well as having the capacity of holding plastic spikes in position during service have included a number of drawbacks.

Summary of the Invention

Briefly, the present invention is a shoe sole construction including a configured lightweight socket bearing insert having reinforcing means around the sockets and strengthening ribs between the sockets. Spikes are installed into the sockets using locking means on both the sockets and the spikes which locking means on the spike are deformable or frangible or both to allow removal of the spike after it has been installed in lock position.

It is a feature of the invention that inserts, spikes and sockets are made of plastic for lightweight, flexibility and deformability.

Brief Description of the Invention

Fig. 1 is a plan view of a sole plate insert having spike-receiving sockets with one spike installed;

Fig. 2 is a section taken along line 2-2 of Fig. 1 with a portion of the outer shoe sole positioned adjacent the plate insert;

Fig. 3 is an elevational view of a pike;
Fig. 4 is an elevational view of a spike in the process of being initially positioned on the socket;

Fig. 5 is an elevational view of the spike having been rotated further with the spike locking tab being deflected by socket ribs;

Fig. 6 is an elevational view of the spike with the locking tabs having passed the socket ribs; and Fig. 7 is an elevational view of the spike having been rotated in the opposite direction for removal with locking tabs sheared.

Description of the Preferred Embodiment

Referring to Figs. 1-3, molded plastic shoe insert 10 includes thin body 11, three (3) dumbbell-shaped rib portions 12, 13 and 14, and circular raised portion 16. Formed as part of the rib portions 12, 13, 14 are threaded sockets 17, 18, 19, 20, 21, 22 and 23. Rib portions 12, 13, and 14 have generally circular reinforcing elements 17a, 18a, 19a, 20a, 21a, and 22a positioned around the respective sockets. Rib portions 12, 13, and 14 also include rib crosspieces 12b, 13b and 14b. Also shown is shoe spike-carrying unit 26 including metal spike pin 27 with metal base 28 and plastic cap 29. Plastic cap 29 has two (2) wrench-receiving holes 30a, 30b for receiving a tool to screw spike 26 in to install for use and screw it out for removal and replacement.

Turning in particular to Figs. 1 and 2, the

dumbbell rib construction of sole plate 10 permits plate
body 11 to be made thinner than a sole without such
construction. The present construction provides for a
lighter weight and more flexible sole plate. Ribs 12, 13
and 14 also provide spaced-apart support surfaces for a
rubber, leather (or other material) outer shoe sole 36
(Fig. 2). The spacing between outer sole socket receiving
holes 37 permits relative movement between sole 36 and
insert 10. Such relative movement is accomplished with less
required forces as compared with a flat non-rib insert plate

WO 89/04616 PCT/US88/04183

-3-

surface thus providing more flexibility to sole construction.

Turning to Fig. 4, spike 26 is shown in its initial step of being screwed into socket 23. Socket 23 5 which extends upwardly from circular raised portion 16 includes spaced-apart upstanding socket side projections 41 having slanted upper cam surfaces 41a and vertical non-cam surfaces 41b. Spike element 26 carries circular skirt 28 with flexible frangible lock tongues 33 depending in spaced manner from skirt 28. The original shape of lock tongue 33 includes cam surface 33a and vertical non-cam surface 33b. When spike 26 is initially being screwed into socket 23 skirt 28 and the top rim 23a of socket 23 are spaced apart. In Fig. 4, as spike 26 is screwed on in the direction of the arrow, lock tongues 33 just clear upstanding side rib 41. In Fig. 5 after spike 26 has been screwed on further and spike skirt 32 is just above the upper rim 23a of socket 23, lock tongues 33 are forced to be deformed by camming action of upstanding projection cam surfaces 41a. With further turning the lock tongues 33 pass the ribs 41 and restore 20 themselves to some extent to their original shape (Fig. 5). Spike 26 is turned until skirt 32 engages socket upper rim 23a or until the spike 26 is otherwise tightly held in Each expendable tongue 33 will in this installation process pass against, be deformed by, and pass by a number of socket projections 41 a distance X' from rim 23a. interference between projections 41 and tongues 33 as spike 26 is urged to be turned holds spike 26 in place during shoe use.

When replacement of spike 26 is desired, a wrench is used to turn the spike in the opposite direction (arrow of Fig. 6). Since the tongue vertical side 33b is presented to the vertical non-cam side 41b of the projection 41, a portion of tongue 33 will shear off leaving tongue stump 33s

-4-

which stump 33s can clear the projections 41 and permit removal of the spike 26.

It is also contemplated that the depending tongues may be made of selected materials and so shaped such that the tongues will undergo distortion as the spike is installed and when the spike is removed will undergo additional distortion without shearing or breaking.

10

15

20

25

5

10

15

20

I Claim:

- 1. A shoe sole construction for shoes with removable spikes comprising
 - a. an outer sole with a plurality of spaced-apart socket-receiving holes;
 - b. a thin sole insert carrying spike sockets for positioning in such sole holes; reinforcing circular portions around the sockets and in engagement with the outer sole and reinforcing ribs engaging the outer sole and extending between sockets;
 - c. spike elements positioned in the sockets, each spike element having a first reusable lock means thereon;
 - d. second non-reusable lock means on the spike elements sized and shaped to locking engagement with the first lock means which second lock means is deformed, broken or otherwise spent upon disengagement from the first lock means as the spike element is removed.
- 2. A shoe spike and socket arrangement for accomplishing installation in the socket and removal of the spike-carrying element from the socket comprising

 a. a socket mounted in the shoe;
 - b. a complementary spike element having a pin mounted cap, a skirt body and a socket engageable portion;
 - c. at least one first lock means on the socket element;

35

d. at least one deflectable and distortional second lock means on the spike

5

the second lock means being positioned and shaped so that as the spike element is installed to engage the socket the second lock means deforms to reach a position of locking engagement with the first lock means and so that as the spike element is removed further deflection and distortion take place.

• • •


10


15


3. The shoe spike and socket arrangement of claim 2 in which the first lock means is a plurality of spaced-apart projection means and the second lock means is a plurality of tongues means depending from the spike element skirt body


20


4. The shoe spike and socket arrangement of claim 3 in which the first lock means has cam means and non-cam means thereon to permit the second lock means to pass the first lock means with a first resistance as the spike element is installed an to permit the second lock means to pass the first lock means during spike element removal which will create a second resistance which second resistance is greater than the first resistance.

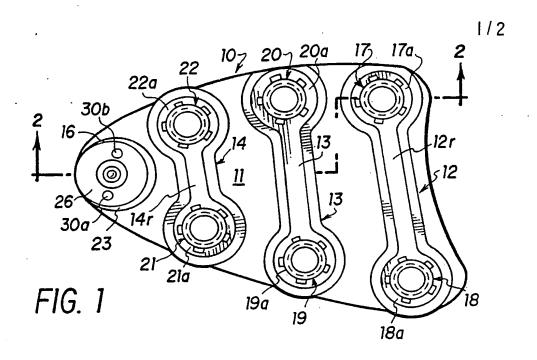

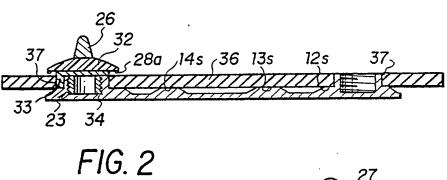




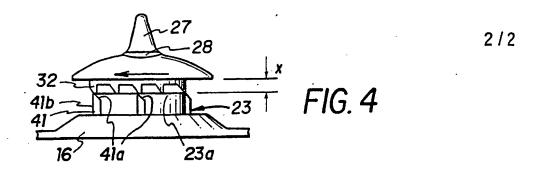

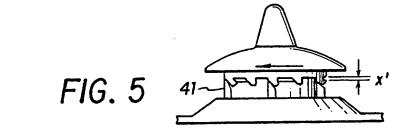

33a

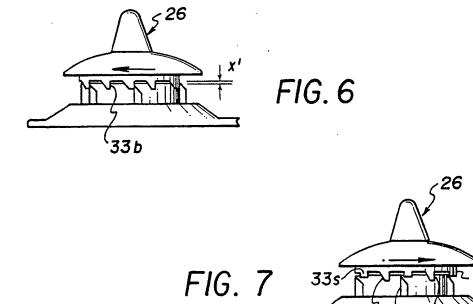

INTERNATIONAL SEARCH REPORT

		International Application No. PCT/L	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				
	ON OF SUBJECT MATTER (if several classifi						
-	ational Patent Classification (IPC) or to both Natio	onal Classification and IPC					
US. 36/134, 127, 67D INT CL. (4) A43B 05/00 A43C 15/16							
II. FIELDS SEARCHED							
	Minimum Documen	tation Searched 7					
Classification System	Classification System Classification Symbols						
U.S.	36/134, 127, 128, 67R, 67A	A, 67D, 65					
	Documentation Searched other the to the Extent that such Documents	nan Minimum Documentation are Included in the Fields Searched ⁸					
	CONSIDERED TO BE RELEVANT 9						
Category • Ci	ation of Document, 11 with indication, where appr	opriate, of the relevant passages 12	Relevant to Claim No. 13.				
	US,A, 4,587,748 COLLINS 13 May 1986 see entire reference						
	., 2,784,503 ANDERSON 12 Mar ee entire reference	1-4					
1 .	a, 2,774,151 DAHLQUIST ET AL ee entire reference	1					
	a, 2,292,299 SMITH 4 August ee entire reference	3-4					
A/P US,	A, 4,723,366 HAGGER 9 February 1988						
A US,	A, 4,648,187 DASSLER ET AL 10 March 1987						
A US,	, 3,328,901 STRICKLAND 4 July 1967						
A US,	, 2,276,887 SMITH 17 March 1942						
A US,	JS,A, 2,223,794 PIERCE ET AL 3 December 1940						
A US,	A, 1,768,426 STELZER 24 Jur	ne 1930					
* Special categories of cited documents: 10 "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date invention "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed IV. CERTIFICATION Date of the Actual Completion of the International Search Date of Mailing of this International Search Report O 1 MAR 1989 International Searching Authority "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the principle or theory underlying the cited to understand the prin							

THIS PAGE BLANK (USP10)